

# WINDOW DIMENSIONS and WEIGHT CAPACITIES


Technical drawing of a mobile cart with dimensions and angles. The drawing shows a side view of the cart with a platform and a base. Dimensions include: 60°, 6", 3", 8-1/4", 5-3/4", 79", 36", 6", 60°, 90°, 8-1/2", 40-1/2", 8-3/4", and 1/2008.

# **TABLE IMAGING WINDOW DIMENSIONS and WEIGHT CAPACITIES**

1700.....	1 & 2
3000.....	3
3001.....	4
3002-3003 .....	5
3100A .....	6
3500.....	7
3501B .....	8
3600B .....	9
6002.....	10 & 11
6600.....	12 & 13
6700 Series .....	14 & 15
STERIS 3085 SP .....	16
BERCHTOLD .....	17
STERIS CMAX .....	18
MAQUET ALPHAMAXX .....	19
MAQUET ALPHASTAR .....	20

# 1700


## IMAGING WINDOW DIMENSIONS AND WEIGHT CAPACITIES

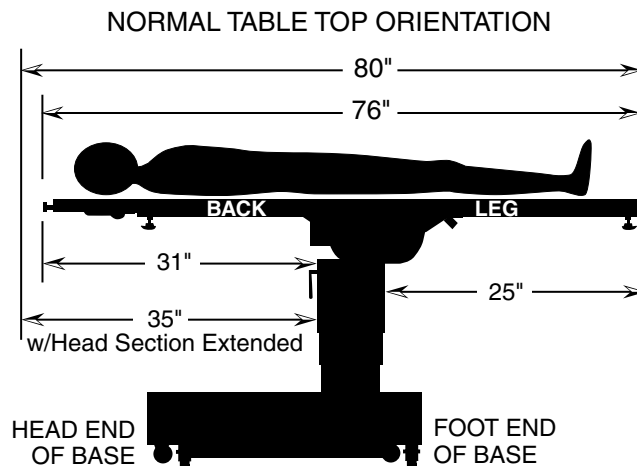

### TOP ROTATION

IF POSITIONED WITHIN THE RED RANGE,  
WEIGHT CAPACITY IS 500 LBS. LIFT  
AND ARTICULATION


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

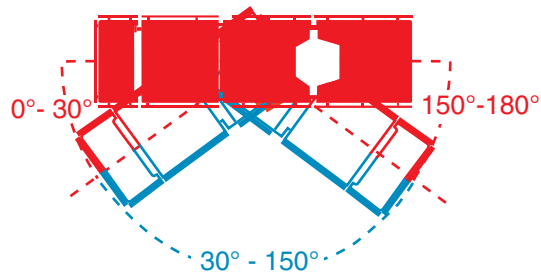

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR


IF POSITIONED WITHIN THE BLUE RANGE,  
WEIGHT CAPACITY IS 500 LBS.  
BUT A HEAVY DUTY SUPPORT ROD **MUST** BE  
USED ON BACK SECTION.  
THE TABLE CANNOT BE ARTICULATED  
WHEN USED WITH A SUPPORT ROD

TOP ROTATED 180°

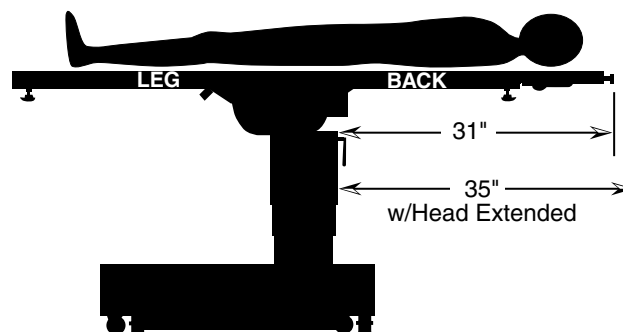

1700  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES


PATIENT REVERSED  
HEAD SECTION ATTACHED TO LEG SECTION

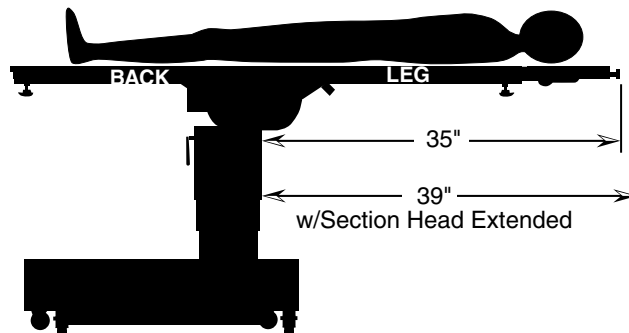

WEIGHT CAPACITY  
200 LBS.  
USE AT 0° OR 180°  
POSITIONS ONLY.


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

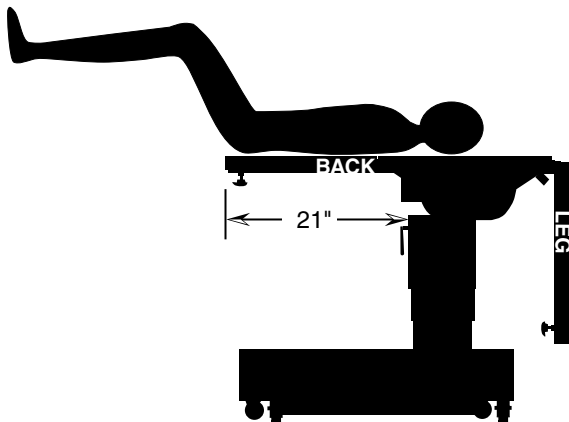


WEIGHT CAPACITY  
500 LBS. WITH BACK  
OVER THE LONG PART  
OF THE BASE.  
ROTATED 180° MAXIMUM WEIGHT  
CAPACITY IS 200 LBS.

3000  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

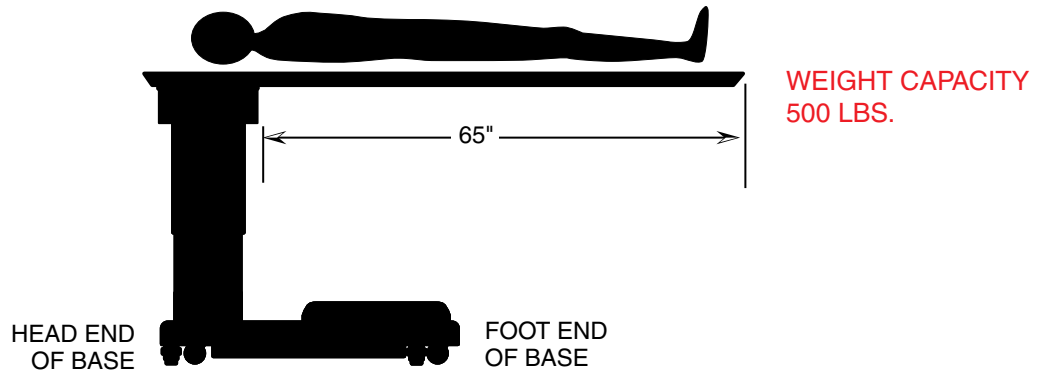


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

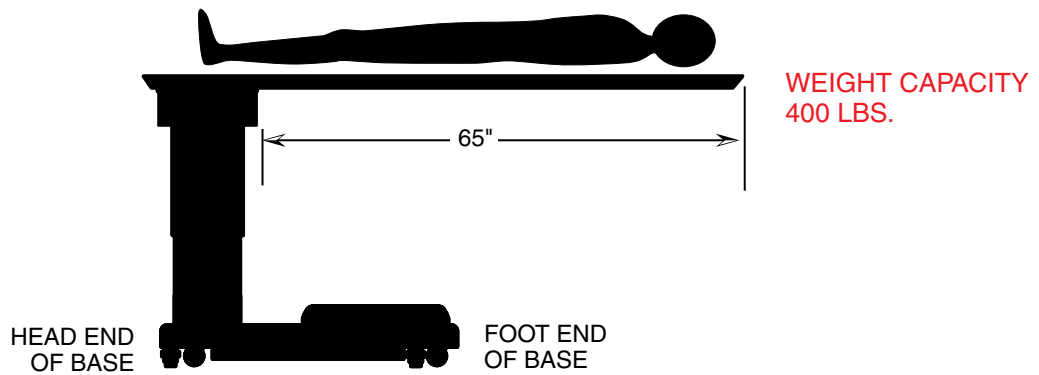


3001  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

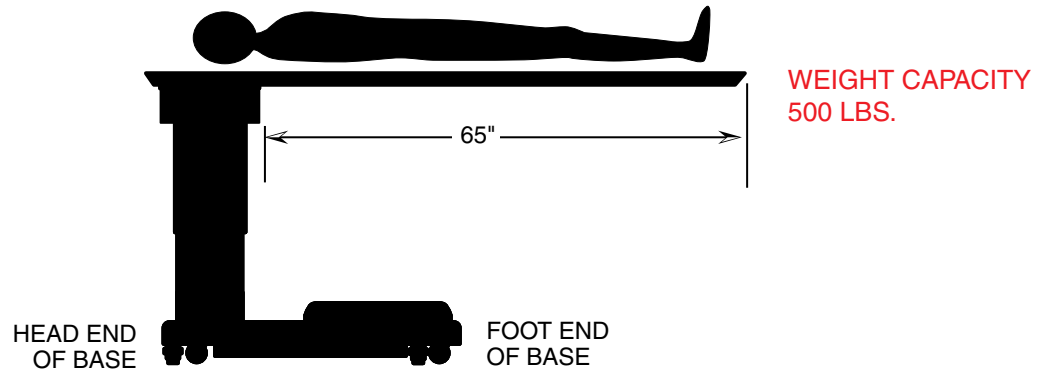


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

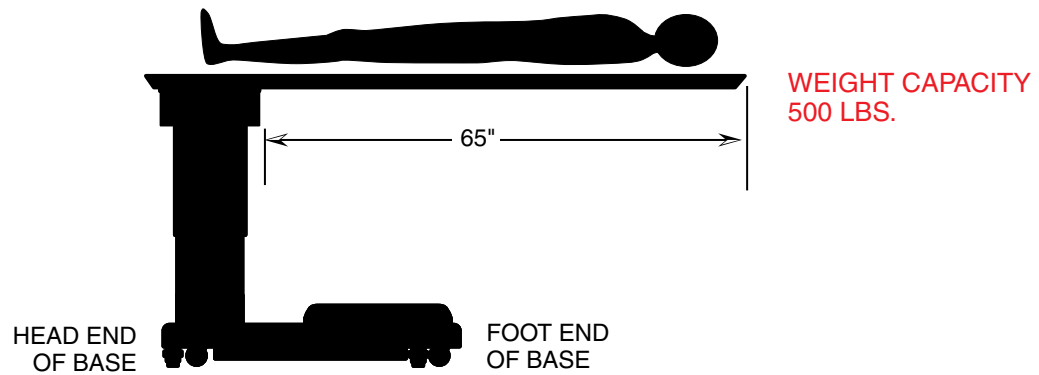


3002-3003  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

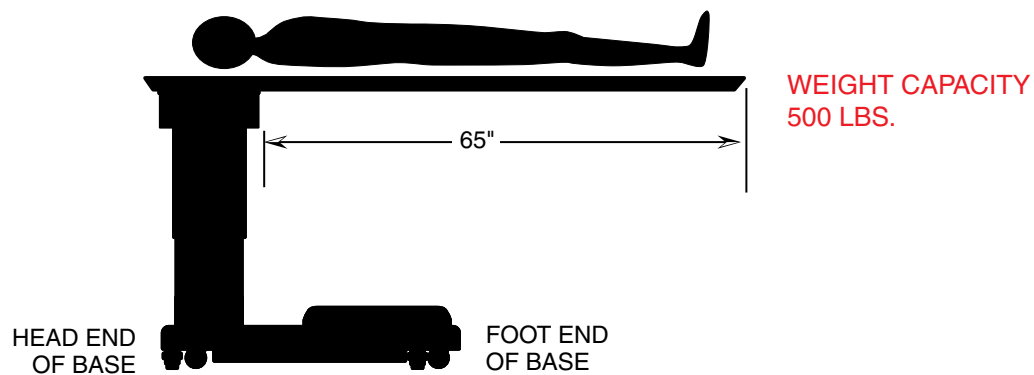


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

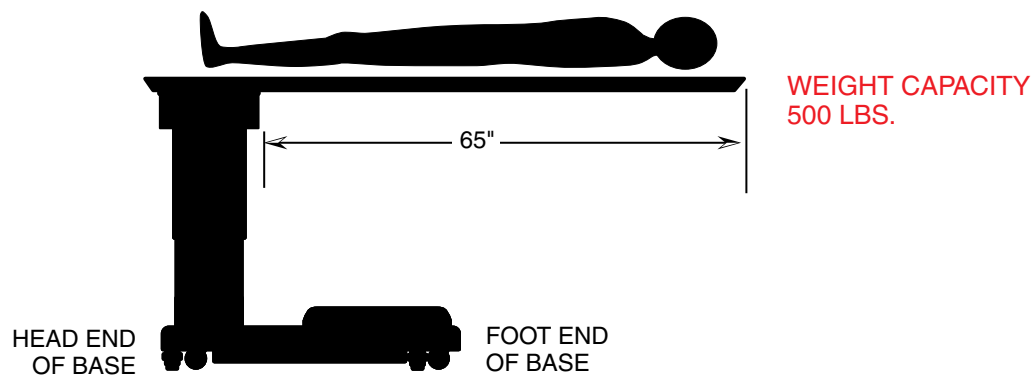


3100A  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

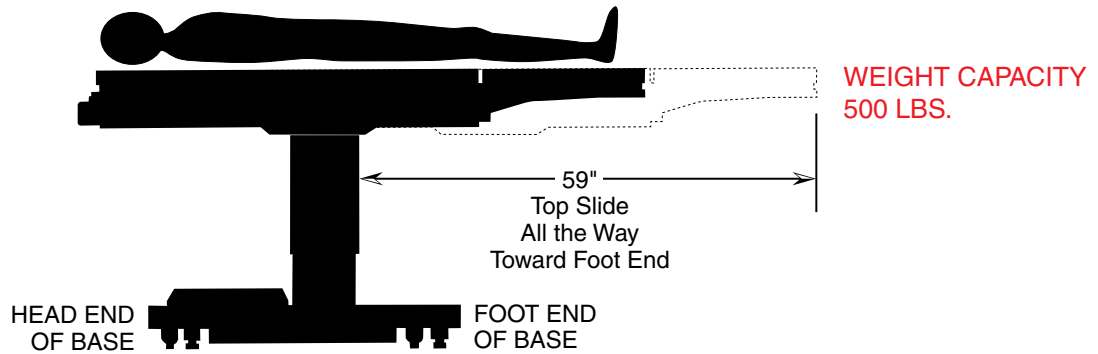


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

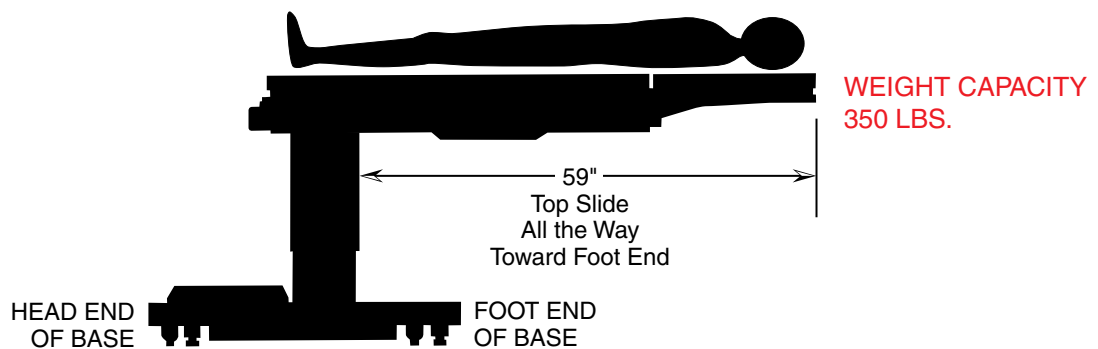


3500  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

NORMAL TABLE TOP POSITION

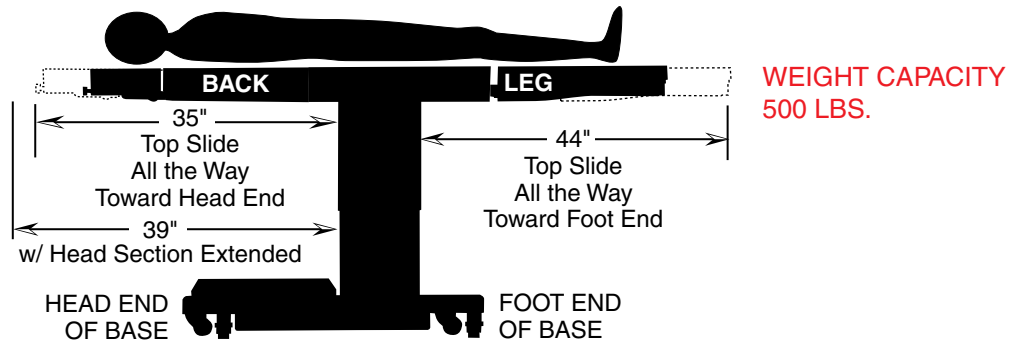


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

PATIENT REVERSED  
HEAD SECTION ATTACHED TO LEG SECTION

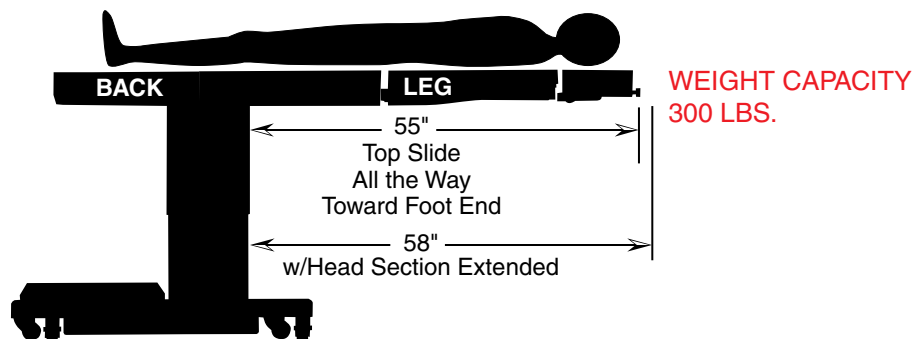


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

LEG SECTION REMOVED

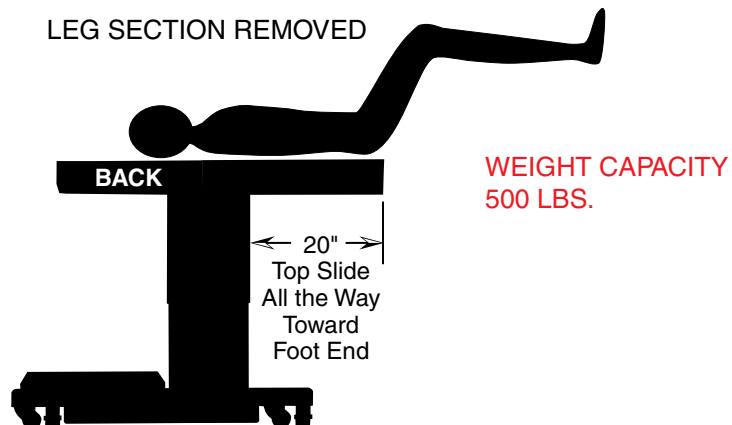


# 3501B IMAGING WINDOW DIMENSIONS AND WEIGHT CAPACITIES

NORMAL TABLE TOP POSITION

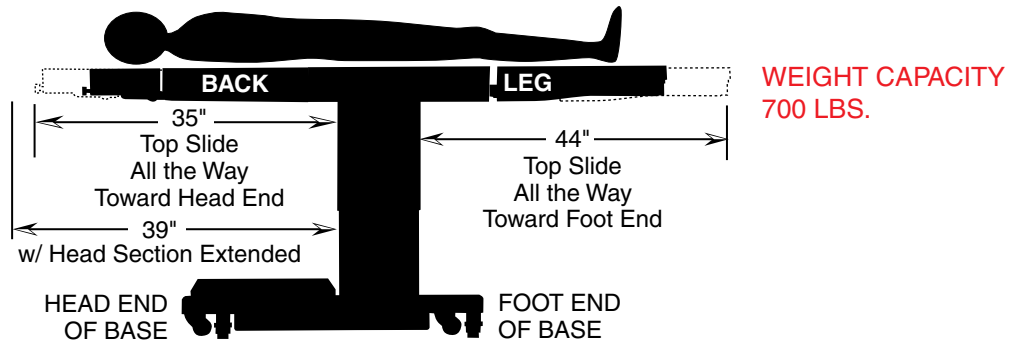


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

PATIENT REVERSED  
HEAD SECTION ATTACHED TO LEG SECTION

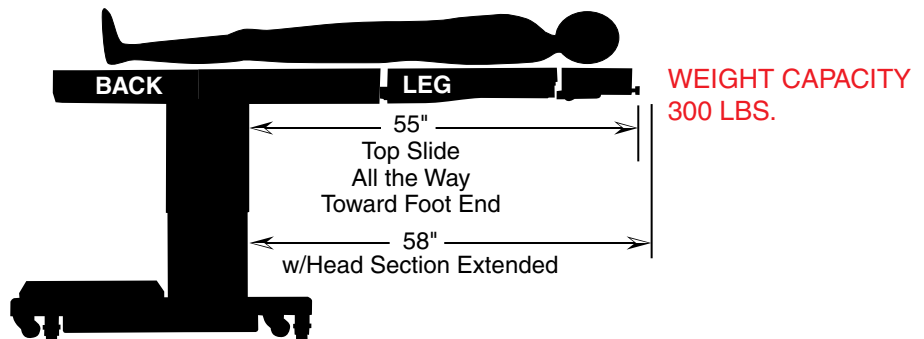


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

LEG SECTION REMOVED

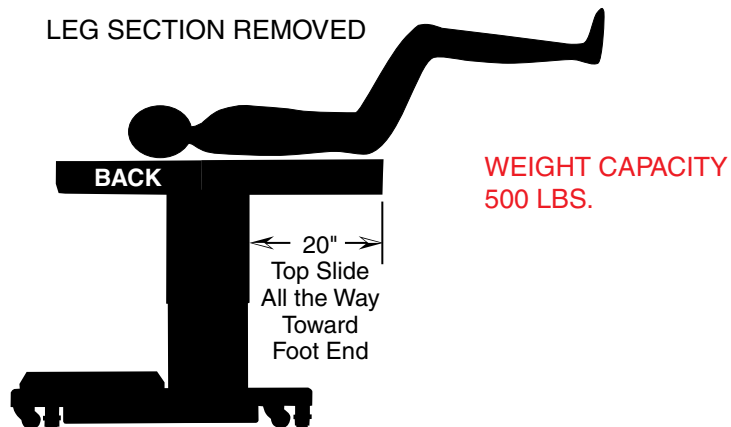


# 3600B IMAGING WINDOW DIMENSIONS AND WEIGHT CAPACITIES

NORMAL TABLE TOP POSITION

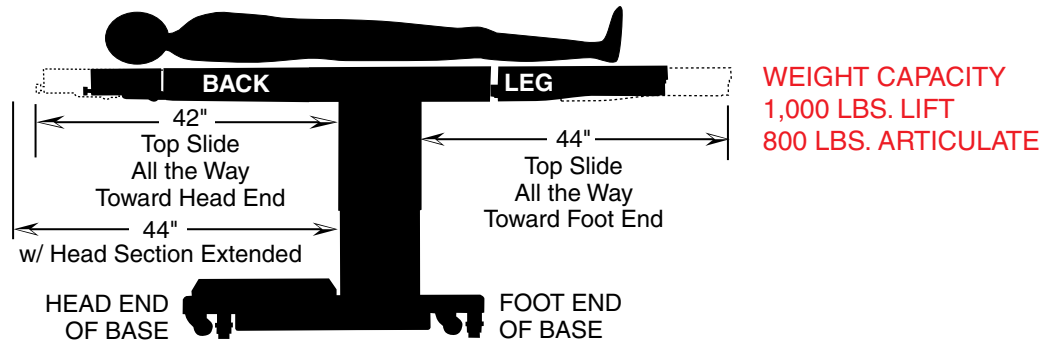


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

PATIENT REVERSED  
HEAD SECTION ATTACHED TO LEG SECTION

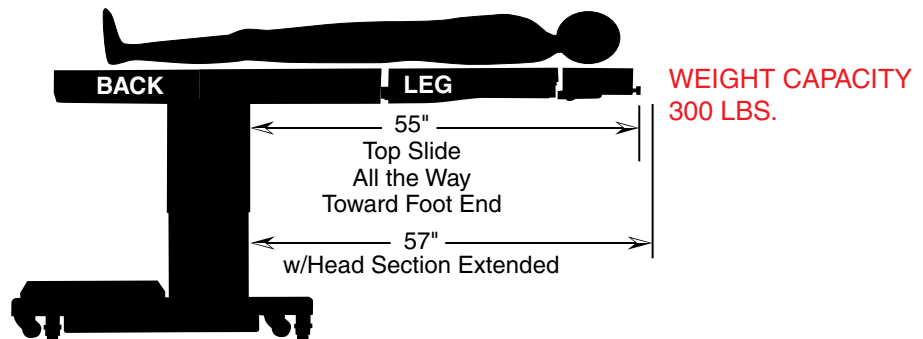


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

LEG SECTION REMOVED

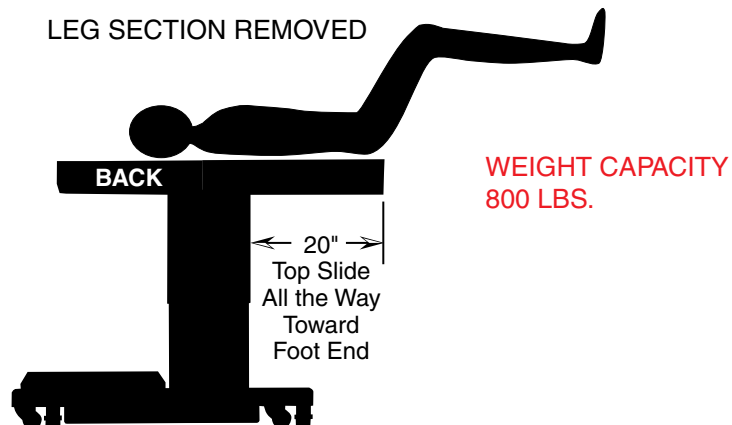


# 6002 IMAGING WINDOW DIMENSIONS AND WEIGHT CAPACITIES

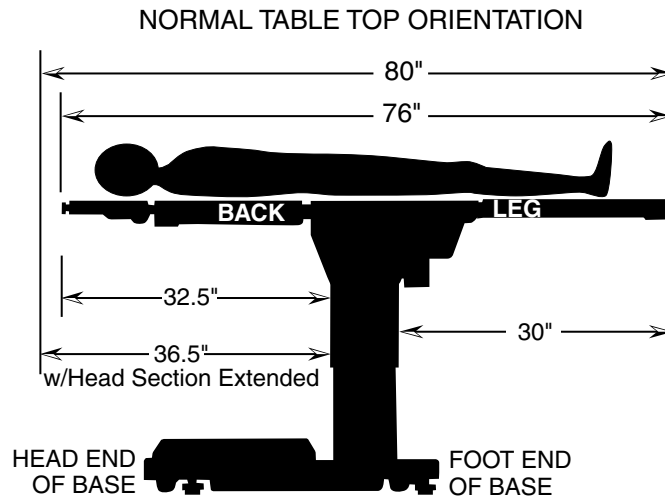

## TOP ROTATION

IF POSITIONED WITHIN THE RED RANGE,  
WEIGHT CAPACITY IS 600 LBS. LIFT  
AND ARTICULATION

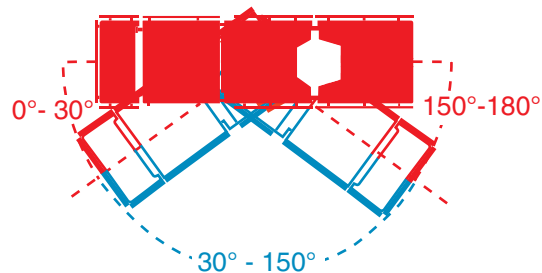


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR


IF POSITIONED WITHIN THE BLUE RANGE,  
WEIGHT CAPACITY IS 600 LBS.  
BUT A HEAVY DUTY SUPPORT ROD **MUST** BE  
USED ON BACK SECTION.  
THE TABLE CANNOT BE ARTICULATED  
WHEN USED WITH A SUPPORT ROD

## TOP ROTATED 180°

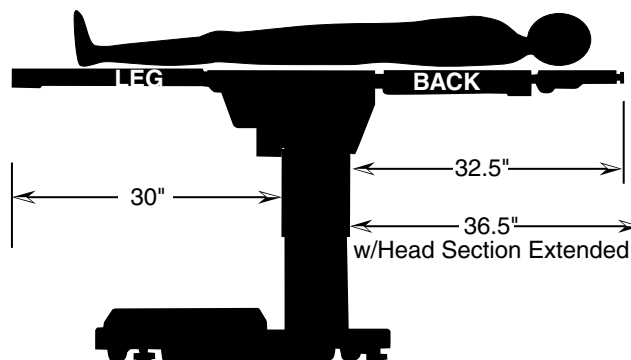


6002  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

PATIENT REVERSED  
HEAD SECTION  
ATTACHED  
TO LEG SECTION

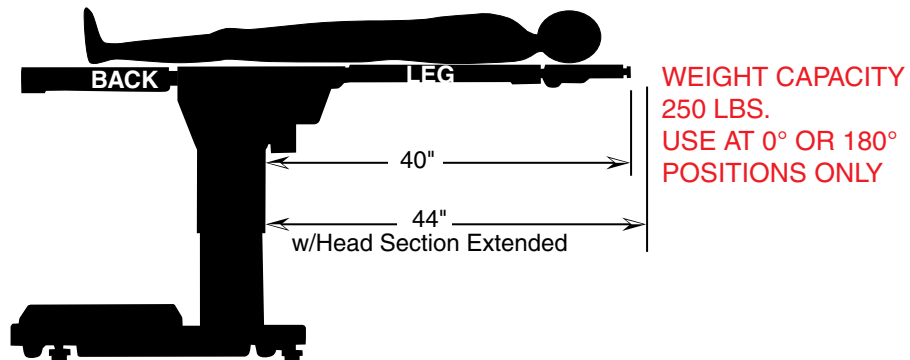


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

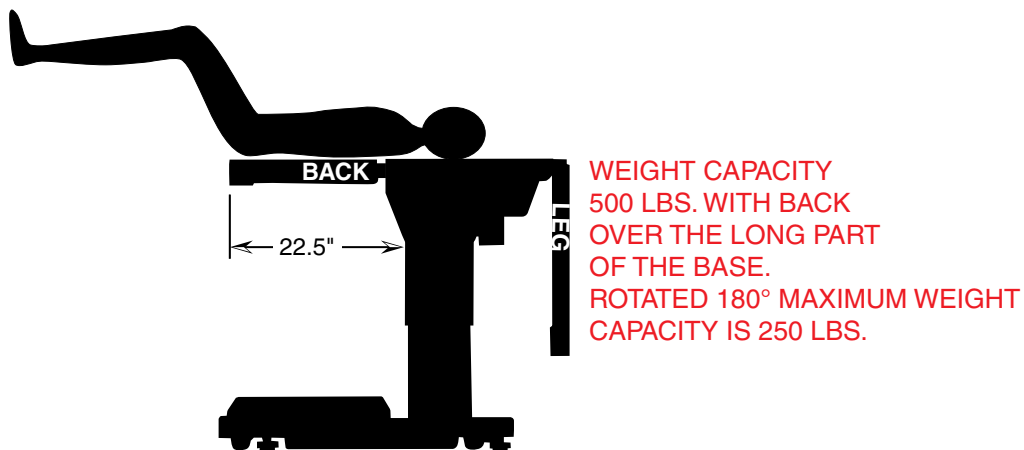


# 6600 IMAGING WINDOW DIMENSIONS AND WEIGHT CAPACITIES

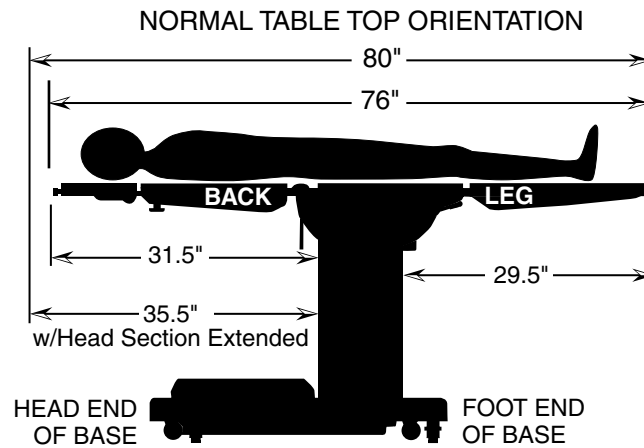

## TOP ROTATION


IF POSITIONED WITHIN THE RED RANGE,  
WEIGHT CAPACITY IS 1,000 LBS. LIFT  
AND 600 LBS. ARTICULATION

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

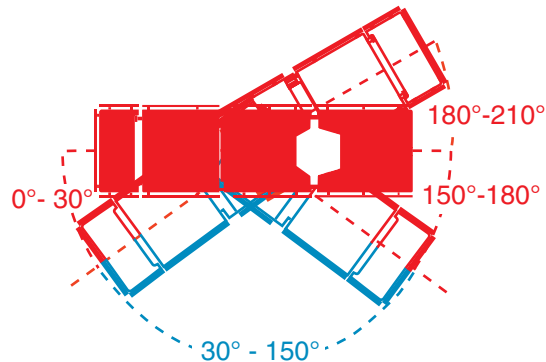


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

IF POSITIONED WITHIN THE BLUE RANGE,  
WEIGHT CAPACITY IS 1,000 LBS.  
BUT A HEAVY DUTY SUPPORT ROD **MUST** BE  
USED ON BACK SECTION.  
THE TABLE CANNOT BE ARTICULATED  
WHEN THE SUPPORT ROD IS USED.

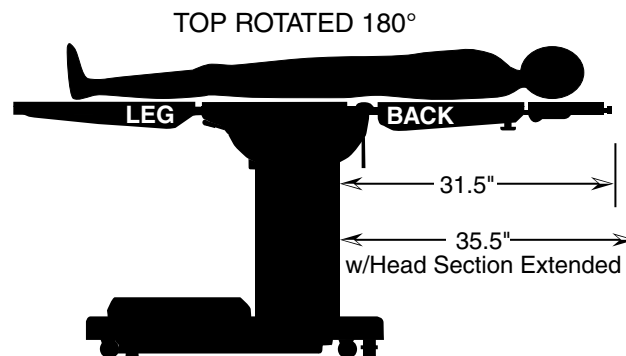

6600  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES


PATIENT REVERSED  
HEAD SECTION  
ATTACHED  
TO LEG SECTION

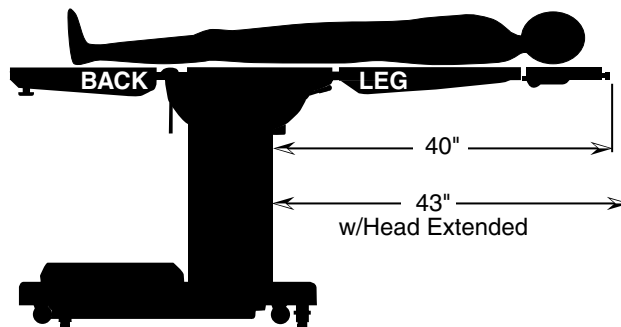

WEIGHT CAPACITY  
300 LBS.  
USE AT 0° OR 180°  
POSITIONS ONLY

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR


BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

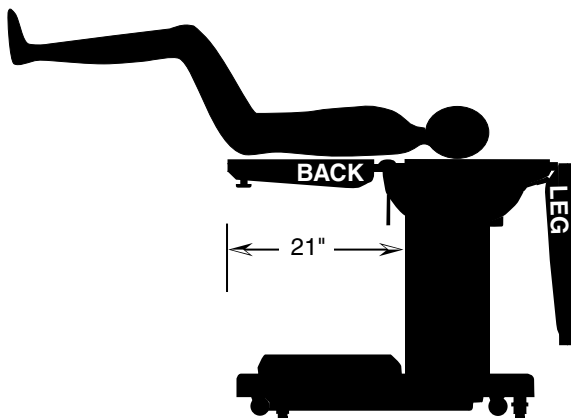

WEIGHT CAPACITY  
500 LBS. WITH BACK  
OVER THE LONG  
PART OF THE BASE.

ROTATED 180° MAXIMUM  
WEIGHT CAPACITY IS 250 LBS.

# 6700 SERIES IMAGING WINDOW DIMENSIONS AND WEIGHT CAPACITIES

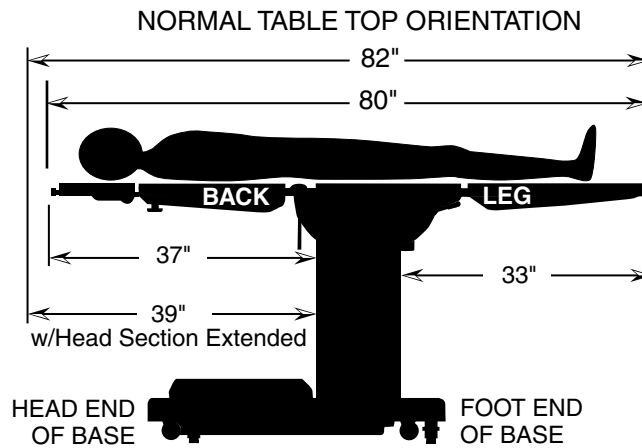


## TOP ROTATION


IF POSITIONED WITHIN THE RED RANGE,  
WEIGHT CAPACITY IS 1,200 LBS. LIFT  
AND 1,000 LBS. ARTICULATION

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

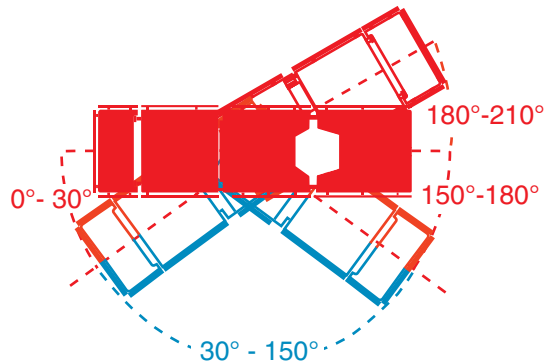


IF POSITIONED WITHIN THE BLUE RANGE,  
WEIGHT CAPACITY IS 1,200 LBS.  
BUT A HEAVY DUTY SUPPORT ROD **MUST** BE  
USED ON BACK SECTION.  
THE TABLE CANNOT BE ARTICULATED  
WHEN THE SUPPORT ROD IS USED.

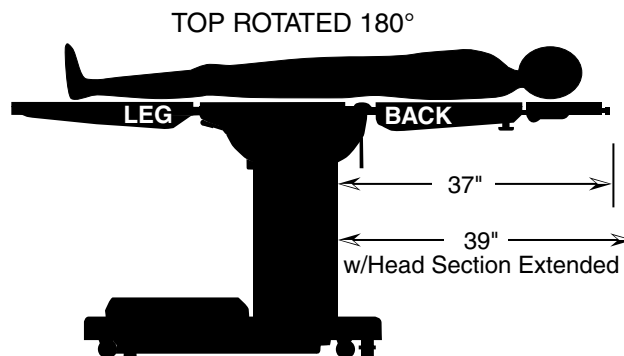

6700 SERIES  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES


PATIENT REVERSED  
HEAD SECTION  
ATTACHED  
TO LEG SECTION

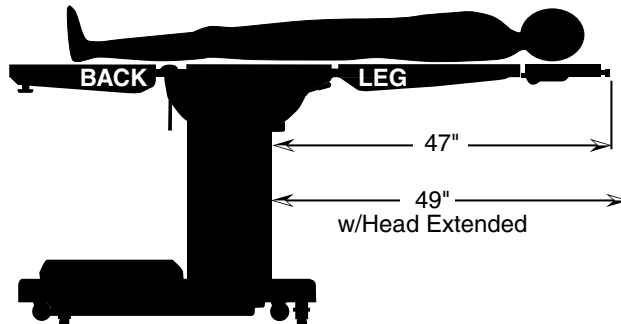

WEIGHT CAPACITY  
500 LBS.  
USE AT 0° OR 180°  
POSITIONS ONLY

BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR




BRAKES MUST  
REMAIN LOCKED  
TO THE FLOOR

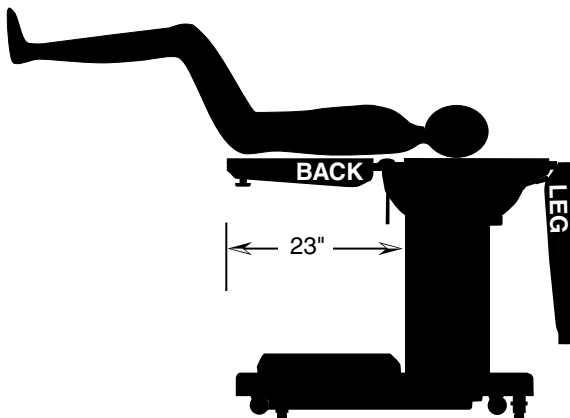

WEIGHT CAPACITY  
1000 LBS. WITH BACK  
OVER THE LONG  
PART OF THE BASE.



ROTATED 180° MAXIMUM  
WEIGHT CAPACITY IS 800 LBS.

STERIS 3085 SP  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

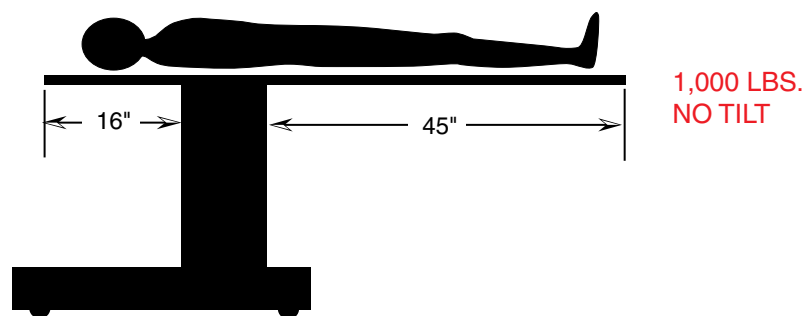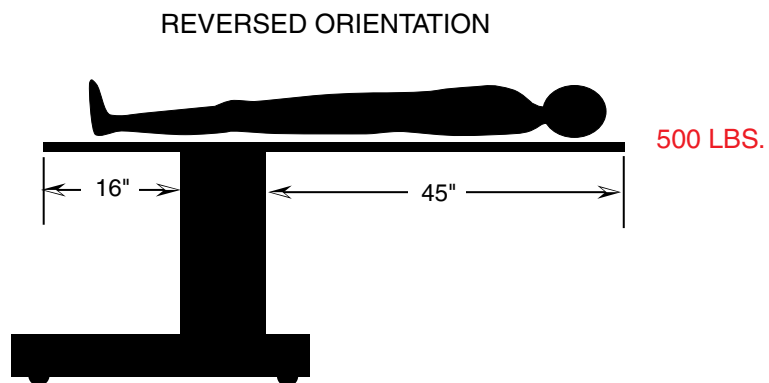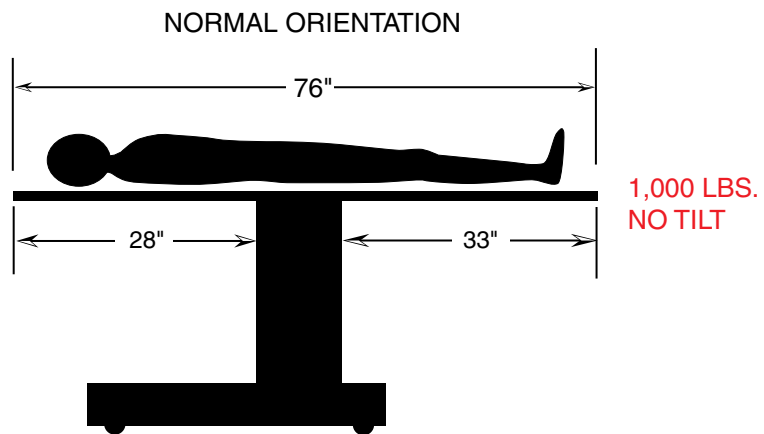


BERCHTOLD OPERON B810  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES



WEIGHT CAPACITY 600 LBS. IN NORMAL OR REVERSED ORIENTATION

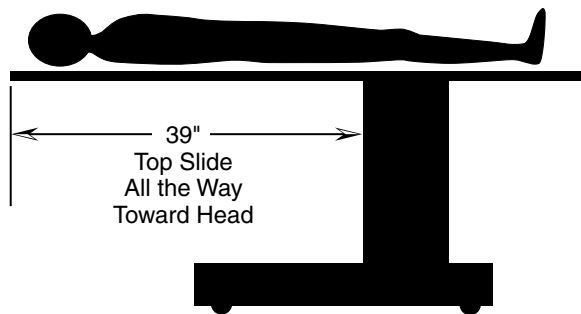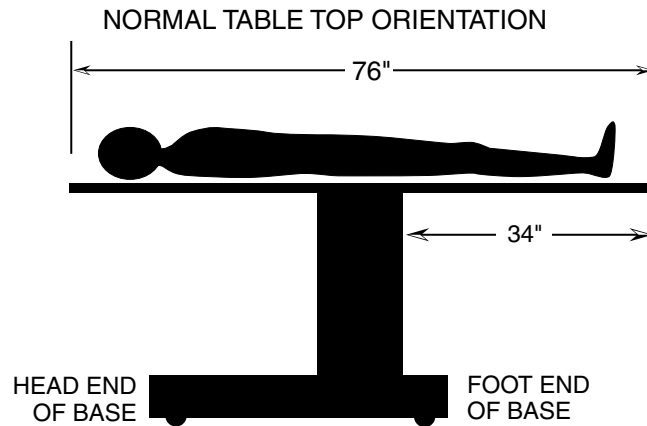

PATIENT REVERSED  
HEAD SECTION ATTACHED TO LEG SECTION

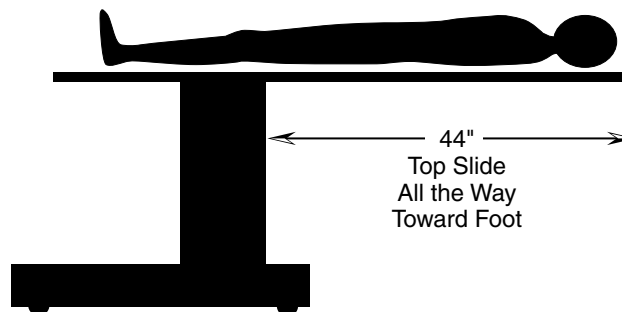


STERIS CMAX  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

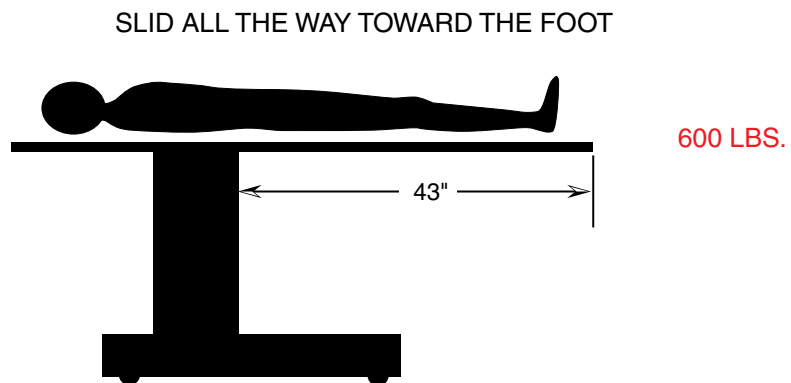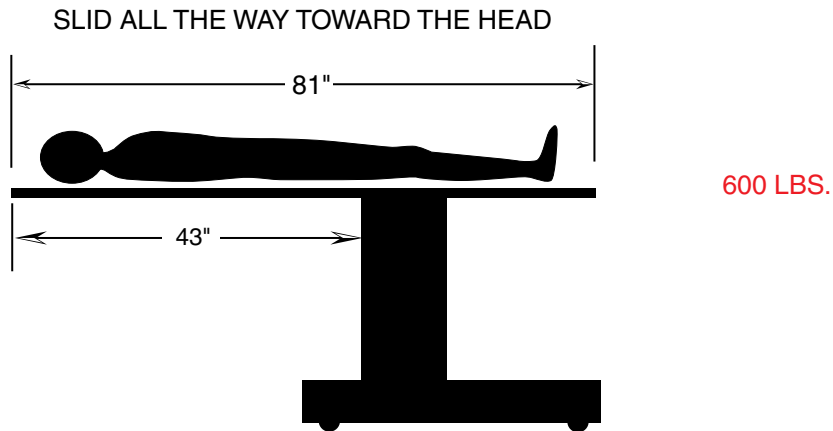

NO REVERSING THE PATIENT


1100 LB. LIFT / 600 LB. ARTICULATE

MAQUET ALPHAMAXX  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

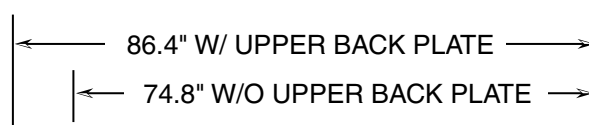


500 LBS. W/ UPPER BACK PLATE  
1,000 LBS. W/O UPPER BACK PLATE

SLID ALL THE WAY TOWARD THE HEAD

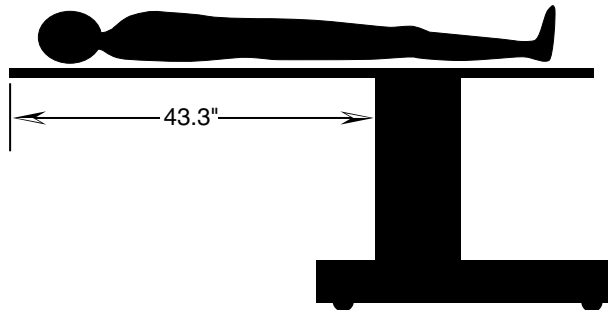


SLID ALL THE WAY TOWARD THE FOOT

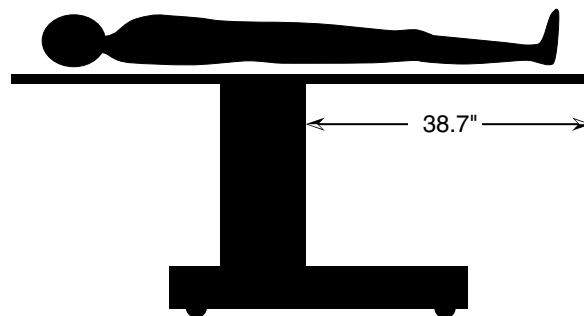

MAQUET ALPHASTAR  
IMAGING WINDOW DIMENSIONS  
AND  
WEIGHT CAPACITIES

NORMAL ORIENTATION

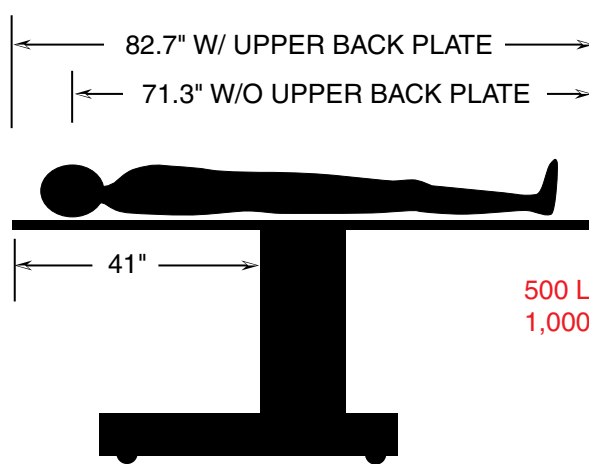

500 LBS. W/ UPPER BACK PLATE  
1,000 LBS. W/O UPPER BACK PLATE

REVERSE ORIENTATION

